

QUICK ACTION COUPLING WITH BUILT-IN FLASHBACK ARRESTOR

CERTIFICATIONS :

Conform with EN 730-1 / EN 561 / ISO 7289 / ISO 5172

FEATURES :

- Dust filter protects the device free from dirt and grease (DF)
- Non-return valve prevents gas returning back to the upstream of the device (NV)
- Flame arrestor repeatedly arrests flames by a sintered stainless steel element (FA)
- Robust brass construction provides durability
- Quick and easy connection / disconnection with equipment



TECHNICAL DATA :

Gas Types	OXYGEN (O)	ACETYLENE (A)	PROPANE (P)	HYDROGEN (H)
Working Pressure	1.00 MPa 10 bar	0.15 MPa 1.5 bar	0.35 MPa 3.5 bar	0.35 MPa 3.5 bar
Ambient/Working Temperature	- 20°C ~ 70°C			
Threads (According to EN 560)	G1/4 RH G3/8 RH M16 x 1.5 RH 9/16"-18 RH 5/8"-18 RH		G1/4 LH G3/8 LH M16 x 1.5 LH 9/16"-18 LH 5/8"-18 LH	

SPECIFICATIONS :

Model	Description	Connection Type	Type	Diameter	Length	Weight
QF188-R	Male	CP Thread 9/16"-18 RH	For Torch	21mm	73.5mm	103g
QF188-L		CP Thread 9/16"-18 LH	For Torch	21mm	73.5mm	103g
QF188-RGB		CP Thread G3/8 RH	For Torch	21mm	73.5mm	103g
QF188-LGB		CP Thread G3/8 LH	For Torch	21mm	73.5mm	103g
QF288-R		QAC Thread 9/16"-18 RH	For Regulator	21mm	83.5mm	150g
QF288-L	Female	QAC Thread 9/16"-18 LH	For Regulator	21mm	83.5mm	150g
QF288-RGB		QAC Thread G3/8 RH	For Regulator	21mm	83.5mm	150g
QF288-LGB		QAC Thread G3/8 LH	For Regulator	21mm	83.5mm	150g
QF388-R6		QAC Hose connection Ø1/4" (6mm)	For Hose	21mm	90.5mm	120g
QF388-L6		QAC Hose connection Ø1/4" (6mm)	For Hose	21mm	90.5mm	120g
QF388-R8		QAC Hose connection Ø5/16" (8mm)	For Hose	21mm	90.5mm	120g
QF388-L8		QAC Hose connection Ø5/16" (8mm)	For Hose	21mm	90.5mm	120g
QF388-R9.5		QAC Hose connection Ø3/8" (9.5mm)	For Hose	21mm	90.5mm	120g
QF388-L9.5		QAC Hose connection Ø3/8" (9.5mm)	For Hose	21mm	90.5mm	120g
QF488-RC		QAC Thread 9/16"-18 RH	For Hose / Torch	21mm	75.5mm	120g
QF488-LC		QAC Thread 9/16"-18 LH	For Hose / Torch	21mm	75.5mm	120g
QF488-RGBC		QAC Thread G3/8 RH	For Hose / Torch	21mm	75.5mm	120g
QF488-LGBC		QAC Thread G3/8 LH	For Hose / Torch	21mm	75.5mm	120g



The Innovators of High Production, Cost Efficient Gas Control Devices.

FEATURES :

- ▶ Long lasting stainless steel or chromed brass pin connection.
- ▶ Automatic gas cut-off to positively shut off the gas supply when disconnected.
- ▶ Durable brass and stainless steel construction.

Conform to
EN 561 / ISO 7289

Male



Q388-L8



Q188-LGB



Q388-A06

Part No.	Description	Connection Type	Type
Q388-R6	Male	CP Hose connection Ø1/4" (6mm)	For Hose
Q388-L6		CP Hose connection Ø1/4" (6mm)	
Q388-R8		CP Hose connection Ø5/16" (8mm)	
Q388-L8		CP Hose connection Ø5/16" (8mm)	
Q388-R9.5		CP Hose connection Ø3/8" (9.5mm)	
Q388-L9.5		CP Hose connection Ø3/8" (9.5mm)	
Q188-R		CP Thread UNF9/16"-18 RH	For Torch
Q188-L		CP Thread UNF9/16"-18 LH	
Q188-AR		CP Thread UNF5/8"-18 RH	
Q188-AL		CP Thread UNF5/8"-18 LH	
Q188-RA		CP Thread G1/4" RH	
Q188-LA		CP Thread G1/4" LH	
Q188-RB		CP Thread M16X1.5 RH	
Q188-LB		CP Thread M16X1.5 LH	
Q188-RGB		CP Thread G3/8" RH	For Regulators.
Q188-LGB		CP Thread G3/8" LH	
Q388-A01		CP Thread UNF9/16"-18 RH	
Q388-A06		CP Thread UNF9/16"-18 LH	
Q388-A04		CP Thread UNF5/8"-18 RH	
Q388-A09		CP Thread UNF5/8"-18 LH	
Q388-A05		CP Thread G1/4" RH	
Q388-A10		CP Thread G1/4" LH	
Q388-A03		CP Thread M16X1.5 RH	
Q388-A08		CP Thread M16X1.5 LH	
Q388-A02		CP Thread G3/8" RH	
Q388-A07		CP Thread G3/8" LH	

Female



Q188-R8



Q288-RGB



Q188-RGBC

Part No.	Description	Connection Type	Type
Q188-R6	Female	QAC Hose connection Ø1/4" (6mm)	For Hose or Torch.
Q188-L6		QAC Hose connection Ø1/4" (6mm)	
Q188-R8		QAC Hose connection Ø5/16" (8mm)	
Q188-L8		QAC Hose connection Ø5/16" (8mm)	
Q188-R9.5		QAC Hose connection Ø3/8" (9.5mm)	
Q188-L9.5		QAC Hose connection Ø3/8" (9.5mm)	
Q288-R		QAC Thread UNF9/16"-18 RH	For Regulators.
Q288-L		QAC Thread UNF9/16"-18 LH	
Q288-AR		QAC Thread UNF5/8"-18 RH	
Q288-AL		QAC Thread UNF5/8"-18 LH	
Q288-RA		QAC Thread G1/4" RH	
Q288-LA		QAC Thread G1/4" LH	
Q288-RB		QAC Thread M16X1.5 RH	For Hose or Torch
Q288-LB		QAC Thread M16X1.5 LH	
Q288-RGB		QAC Thread G3/8" RH	
Q288-LGB		QAC Thread G3/8" LH	
Q188-RC		QAC Thread UNF9/16"-18 RH	
Q188-LC		QAC Thread UNF9/16"-18 LH	
Q188-ARC		QAC Thread UNF5/8"-18 RH	
Q188-ALC		QAC Thread UNF5/8"-18 LH	
Q188-RAC		QAC Thread G1/4" RH	
Q188-LAC		QAC Thread G1/4" LH	
Q188-RBC		QAC Thread M16X1.5 RH	
Q188-LBC		QAC Thread M16X1.5 LH	
Q188-RGBC		QAC Thread G3/8" RH	
Q188-LGBC		QAC Thread G3/8" LH	




GRAPHIC OVERVIEW OF CONNECTION

FA = Flashback Arrestor


FOR TORCH TO HOSE



Flashback Arrestor

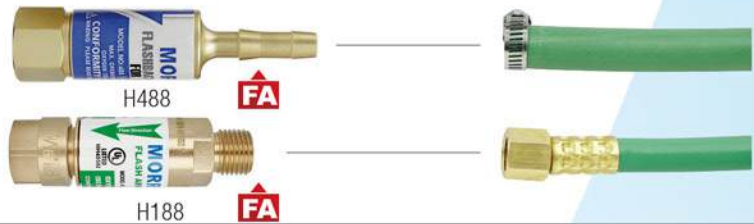

Quick Action Coupling with Built-in Flashback Arrestor

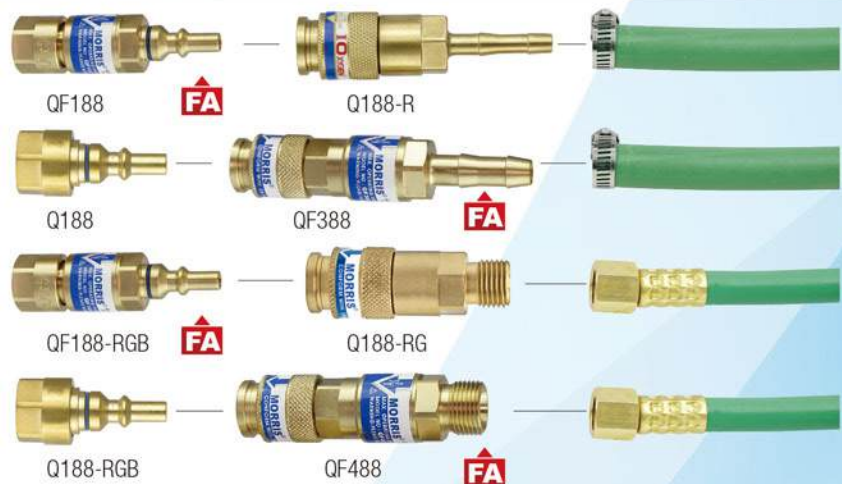

Quick Action Coupling



FOR HOSE TO HOSE

Flashback Arrestor



Quick Action Coupling with Built-in Flashback Arrestor




Quick Action Coupling




GRAPHIC OVERVIEW OF CONNECTION

Flashback Arrestor

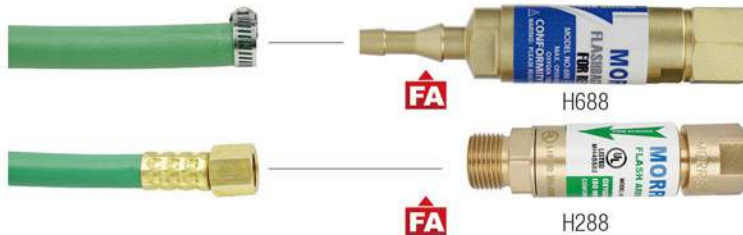

= Flashback Arrestor

Quick Action Coupling with Built-in Flashback Arrestor

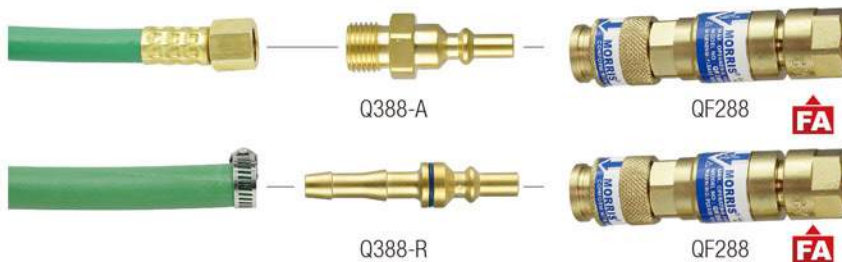

FOR REGULATOR TO HOSE



Quick Action Coupling



FOR HOSE TO HOSE

Quick Action Coupling



Quick Action Coupling with Built-in Flashback Arrestor

